



Arès Mini

Description :

Surface mounted LED spotlight.


Uses :

Supermarkets, shops, etc....

Product informations :

LED driver included / Material : die-cast aluminium / CRI > 80

Dimensions :

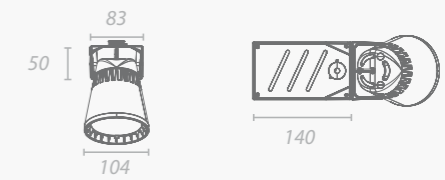

On specific surface hook for triple circuit rail adaptor...

Wattage, luminous flux and performance (standard light sources) :

		Flux	Wattage	Performance	Lamp life
3000°K	2000 Lm	2688 Lm	17,3 W	155 Lm/W	50 000 hours L80 B10
3000°K	3000 Lm	3402 Lm	24,8 W	137 Lm/W	50 000 hours L80 B20
3000°K	4000 Lm	4651 Lm	31,5 W	148 Lm/W	50 000 hours L80 B20
3000°K	4600 Lm	4728 Lm	30,7 W	154 Lm/W	50 000 hours L80 B10
4000°K	2000 Lm	2098 Lm	11,7 W	179 Lm/W	50 000 hours L80 B10
4000°K	3000 Lm	3515 Lm	22,7 W	155 Lm/W	50 000 hours L80 B20
4000°K	4000 Lm	4181 Lm	27,6 W	151 Lm/W	50 000 hours L80 B20
4000°K	4600 Lm	4688 Lm	28,9 W	162 Lm/W	50 000 hours L80 B10
5000°K	2000 Lm	2098 Lm	11,7 W	179 Lm/W	50 000 hours L80 B10
5000°K	3000 Lm	3300 Lm	22,7 W	156 Lm/W	50 000 hours L80 B20
5000°K	4000 Lm	4181 Lm	27,6 W	161 Lm/W	50 000 hours L80 B20
5000°K	4600 Lm	4688 Lm	28,9 W	162 Lm/W	50 000 hours L80 B10

Wattage, luminous flux and performance (in specific colours) :

		Flux	Wattage	Performance	Lamp life
Food	2248 Lm (equal to 4000 lm + food filter)		32,2 W	71 Lm/W	55000 hours L80 F50
Bakery	2341 Lm (equal to 4000 lm + bakery filter)		32,2 W	74 Lm/W	55000 hours L80 F50
Seafood	2225 Lm (equal to 4000 lm + food filter)		32,2 W	70 Lm/W	55000 hours L80 F50
Shop	3378 Lm		32,2 W	106 Lm/W	55000 hours L80 F10
Fish	4331 Lm		35,7 W	121 Lm/W	50000 hours L80 B20

Filters :

For standard light sources : Standard / food / bakery / opaline

Mountings :


Specific surface hook for triple circuit rail adaptor, triple circuit rail adaptor

Finishes :


White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :


Reflector RG15 :

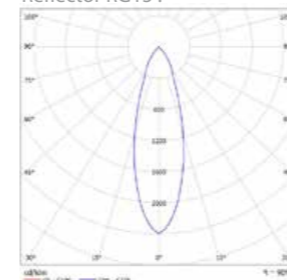

Reflector RG20 :

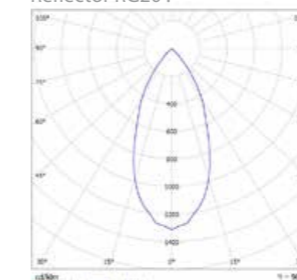

Reflector RG30 :

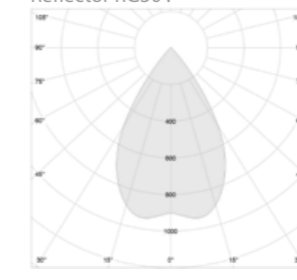

On triple circuit rail adaptor...

(Ta < 35°C)

Not contractual document



Spotlights Arès Mini mounted on triple circuit rail adaptor.

