



Description :

LED luminaire for road lighting with tilting sleeve for mast or stick mounting


Product informations :

Materials: Aluminum and safety glass.
Without option: ON / OFF light.
Mounting in top mast or on stock (Ø 60 mm).
Assembly at 6 - 12 m height. 30 ° reclining luminaire.
Class 1 or Class 2 luminaire. IRC 70

Finishes :

Gray / powder-coated RAL colors (optional)

Dimensions :

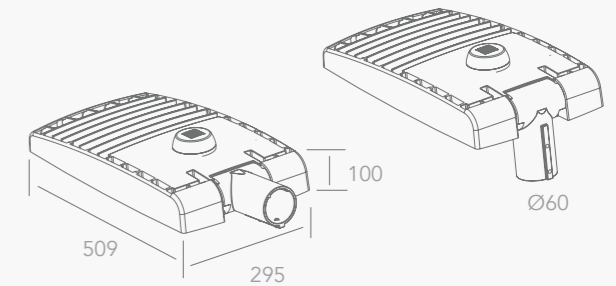

Wattage, luminous flux and performance :

	53W	74W	105W	149W
3000°K	8100lm - 153lm/W	10600lm - 143lm/W	16200lm - 153lm/W	21260lm - 143lm/W
4000°K	8500lm - 160lm/W	11200lm - 151lm/W	17000lm - 162lm/W	22400lm - 150lm/W
Lifetime	50 000 H L85B10	50 000 H L85B10	50 000 H L85B10	50 000 H L85B10

Mounting :

Tilt sleeve for mast or stick mounting

Options :


Cut-off at the opening of the luminaire.
Programmable driver
Powder coating RAL colors
Brightness detection
Remote programming (radio) + remote management
Available in 3000°K

Driver :


DALI, 1/10v, ON/OFF

Light distribution curves :


Road Extra Wide

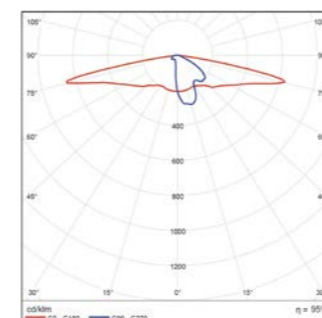


Asymetric 24 LED

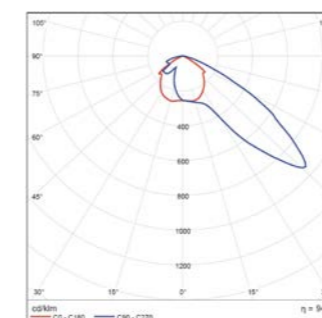

Circular 24 LED

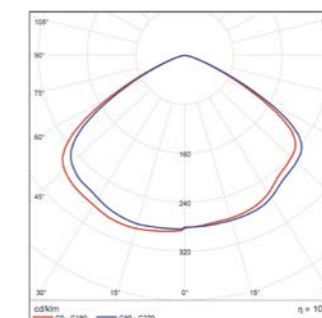

Road 24 LED

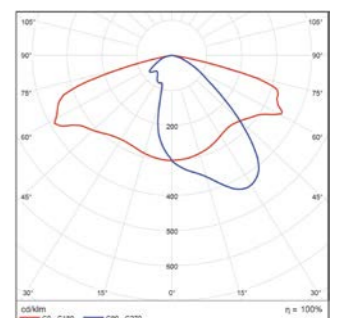

(Ta ≤ 35°)

Not contractual document

LED luminaire for road lighting with tilting sleeve for mast or stick mounting

