



Flipp

Flipp on specific surface hook for triple circuit rail adaptor...



Flipp on triple circuit rail adaptor...



Not contractual document

Description :

Double surface mounted LED spotlight.


Uses :

Supermarkets, shops, etc....

Product informations :

LED driver included / Material : die-cast aluminium / CRI > 80

Dimensions :

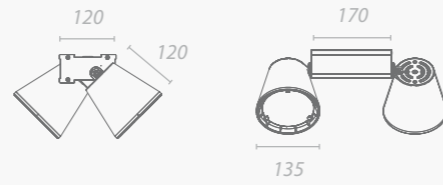

Wattage, luminous flux and performance (standard light sources) :

		Flux	Wattage	Performance	Lamp life
3000°K	2000 Lm	2x2688 Lm	2x17,3 W	155 Lm/W	50 000 hours L80 B10
3000°K	3000 Lm	2x3402 Lm	2x24,8 W	137 Lm/W	50 000 hours L80 B20
3000°K	4000 Lm	2x4651 Lm	2x31,5 W	148 Lm/W	50 000 hours L80 B20
3000°K	5000 Lm	2x5222 Lm	2x37,1 W	141 Lm/W	50 000 hours L80 B20
3000°K	6000 Lm	2x6313 Lm	2x41,5 W	152 Lm/W	50 000 hours L80 B10
4000°K	2000 Lm	2x2098 Lm	2x11,7 W	179 Lm/W	50 000 hours L80 B10
4000°K	3000 Lm	2x3515 Lm	2x22,7 W	155 Lm/W	50 000 hours L80 B20
4000°K	4000 Lm	2x4453 Lm	2x27,6 W	161 Lm/W	50 000 hours L80 B20
4000°K	5000 Lm	2x5433 Lm	2x37,1 W	146 Lm/W	50 000 hours L80 B20
4000°K	6000 Lm	2x6607 Lm	2x41,7 W	158 Lm/W	50 000 hours L80 B10
5000°K	2000 Lm	2x1970 Lm	2x11,7 W	168 Lm/W	50 000 hours L80 B10
5000°K	3000 Lm	2x3515 Lm	2x22,7 W	155 Lm/W	50 000 hours L80 B20
5000°K	4000 Lm	2x4453 Lm	2x27,6 W	161 Lm/W	50 000 hours L80 B20
5000°K	5000 Lm	2x5433 Lm	2x37,1 W	146 Lm/W	50 000 hours L80 B20
5000°K	6000 Lm	2x6204 Lm	2x41,7 W	149 Lm/W	50 000 hours L80 B10

Wattage, luminous flux and performance (in specific colours) :

		Flux	Wattage	Performance	Lamp life
Food	2x2248 Lm (equal to 4000 lm + food filter)	2x2248 Lm	2x32,2 W	71 Lm/W	55000 hours L80 F50
Bakery	2x2341 Lm (equal to 4000 lm + bakery filter)	2x2341 Lm	2x32,2 W	74 Lm/W	55000 hours L80 F50
Seafood	2x2225 Lm (equal to 4000 lm + food filter)	2x2225 Lm	2x32,2 W	70 Lm/W	55000 hours L80 F50
Shop	2x3378 Lm	2x3378 Lm	2x32,2 W	106 Lm/W	55000 hours L80 F10
Fish	2x5760 Lm	2x5760 Lm	2x49,4 W	117 Lm/W	50000 hours L80 B20

Filters :

For standard light sources : Standard / food / bakery / opaline


Mountings :

Specific surface hook for triple circuit rail adaptor, triple rail circuit adaptor

Finishes :


White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :

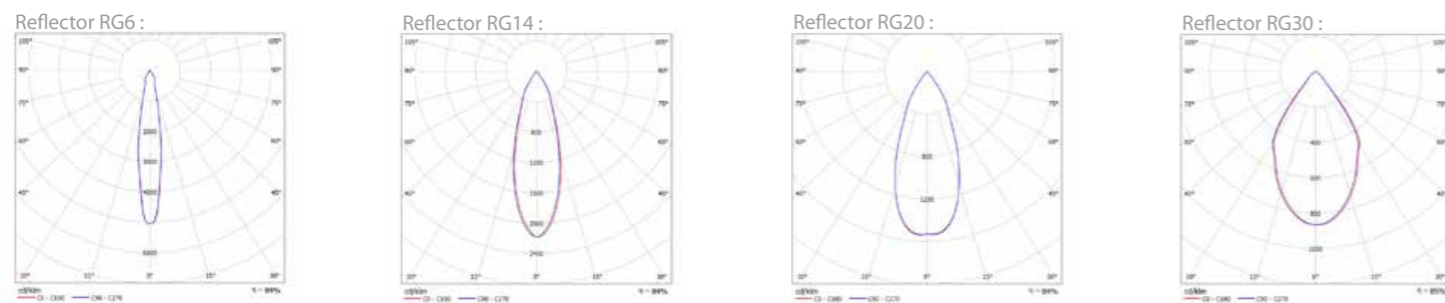

(Ta < 35°C)

Not contractual document

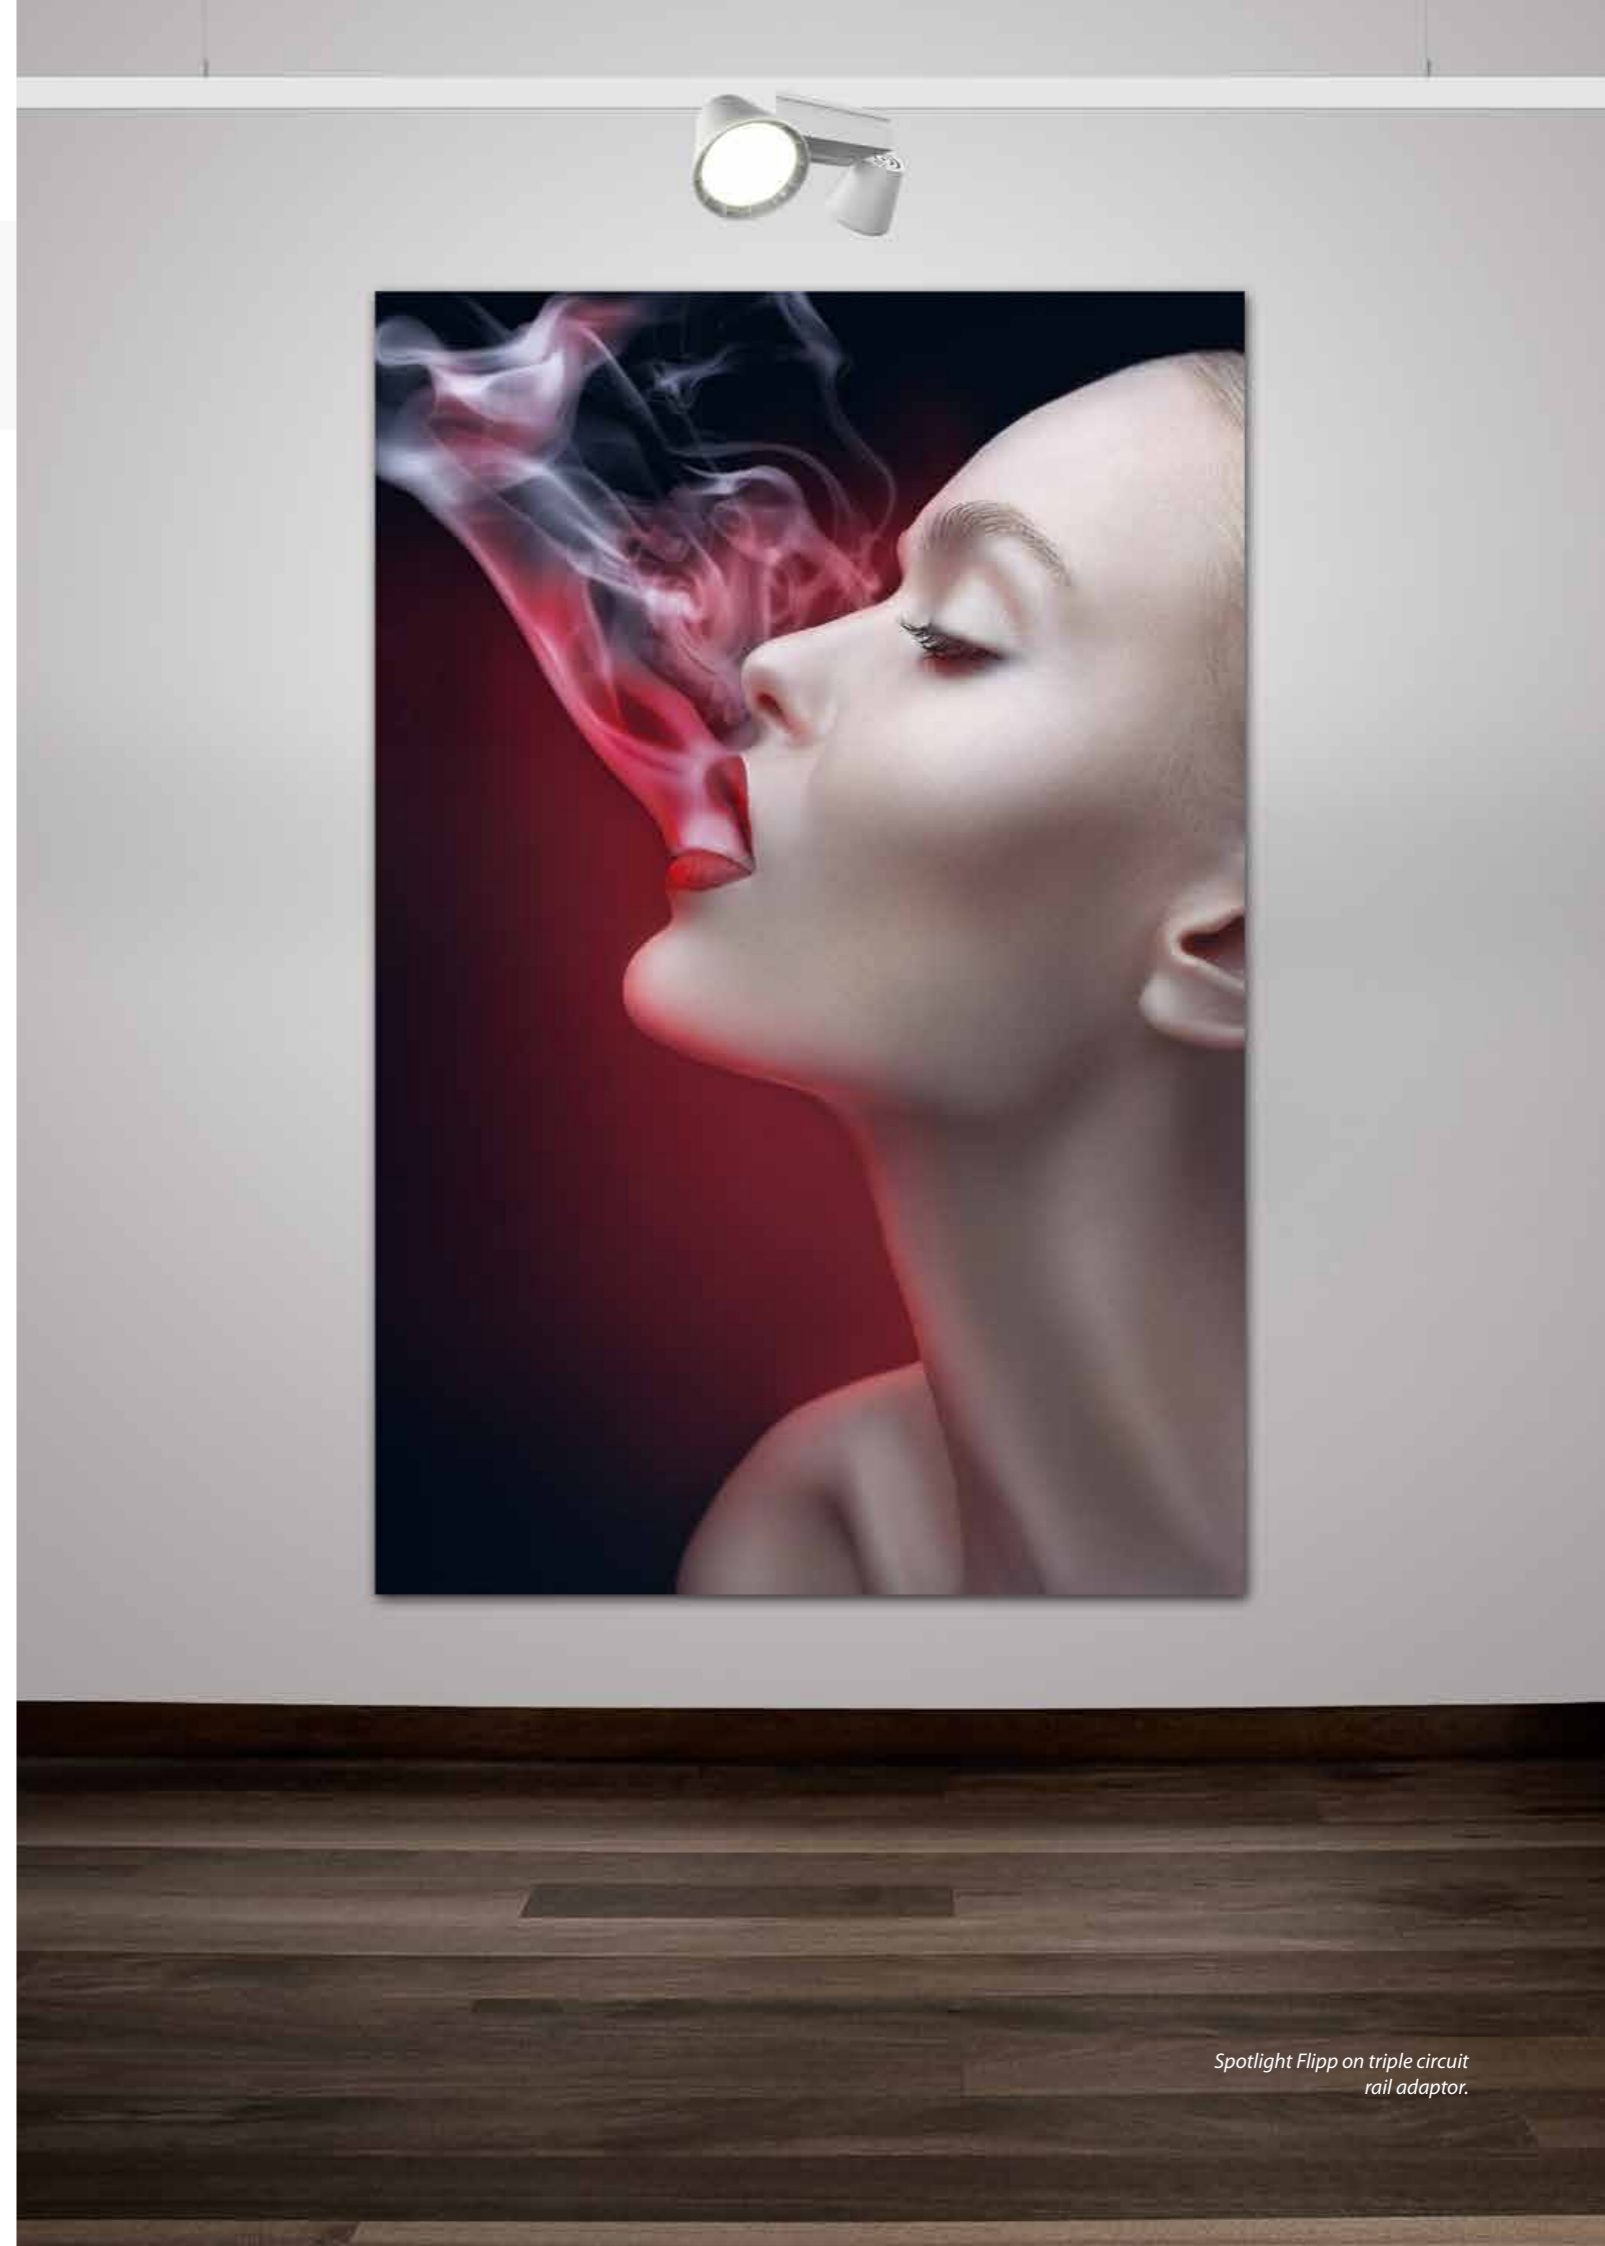

Spotlight Flipp on triple circuit rail adaptor.